



**MADE IN TAIWAN**  
High quality & Easy Working  
Welcome To Visit Our Booth

**TA  
B  
C  
E**



**▶ DIGITAL TORQUE WRENCH**

# DIGITAL TORQUE WRENCH

## Economical Digital Torque Wrench

Accuracy: CW:  $\pm 2\%$ , CCW:  $\pm 3\%$  | Max. Angle:  $360^\circ$



### Specification:

- Memory Setting: 10Sets
- Warning Light: 2LED(1 Green + 1 Red)
- Mode: Peak(K) / Track(F) / Angle(A)
- Units: Nm, kg.cm, lb-in, lb-ft


### Rechargeable Battery Technical Data:

- Battery Type: 602535
- Battery Capacity: 500 mAh
- Type: USB Charge (Type-C)
- Recharge time: 90-120 mins

ITEM NO.	Driver	Setting Range	Length
TF07-ECTA30-1	1/4"	1.5~30Nm	220mmL
TF07-ECTA60-2	3/8"	3.0~60Nm	258mmL
TF07-ECTA135-2	3/8"	6.8~135Nm	258mmL
TF07-ECTA135-3	1/2"	6.8~135Nm	383mmL
TF07-ECTA200-3	1/2"	10~200Nm	383mmL



LCD Display

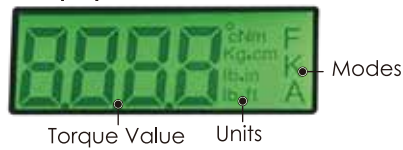

## Digital Torque Wrench

Accuracy: CW:  $\pm 2\%$



ITEM NO.	Driver	Setting Range	Length
RB01-DTW0138	3/8"	27~135Nm	420mmL
RB01-DTW0112	1/2"	40~200Nm	420mmL

## Digital Torque Wrench

Accuracy: CW:  $\pm 3\%$



ITEM NO.	Driver	Setting Range	Length
RB01-DTW02141	1/4" bit	2~20Nm	185mmL
RB01-DTW0214	1/4"	3~30Nm	250mmL
RB01-DTW0238	3/8"	4~80Nm	333mmL

## Digital Torque Wrench - Fixed Head

Accuracy: CW:  $\pm 2\%$ , CCW:  $\pm 3\%$



ITEM NO.	Driver	Setting Range	Length
SD07-1106347	1/2"	10~135Nm	400mmL
SD07-1106348	1/2"	20~200Nm	550mmL
SD07-1106369	1/2"	34~340Nm	600mmL

## Digital Torque Wrench - Flexible Head

Accuracy: CW:  $\pm 2\%$ , CCW:  $\pm 3\%$



ITEM NO.	Driver	Setting Range	Length
SD07-11060660	1/2"	10~135Nm	400mmL
SD07-11060651	1/2"	20~200Nm	550mmL
SD07-11060659	1/2"	34~340Nm	600mmL

## Digital Angle Torque Wrench

Accuracy: CW:  $\pm 1\%$ , CCW:  $\pm 2\%$



ITEM NO.	Driver	Teeth	Setting Range	Length
TF05-AWE2030AN	1/4"	36	1.5~30Nm	390mmL
TF05-AWE3135AN	3/8"	36	6.8~135Nm	415mmL
TF05-AWE4135AN	1/2"	36	6.8~135Nm	415mmL
TF05-AWE4200AN	1/2"	36	10~200Nm	530mmL
TF05-AWE4340AN	1/2"	36	17~340Nm	650mmL

## Digital Torque Wrench


Accuracy: TF04-RJ-28041 - CW:  $\pm 4\%$   
TF04-RJ-28083, TF03-RJ-28021 - CW:  $\pm 3\%$



ITEM NO.	Driver	Teeth	Setting Range	Length
TF04-RJ-28041	1/4"	72	6~30Nm	212mmL
TF04-RJ-28083	3/8"	72	12~60Nm	228mmL
TF04-RJ-28021	1/2"	72	16~80Nm	268mmL

## Mini Digital Torque Wrench

Accuracy: CW:  $\pm 3\%$

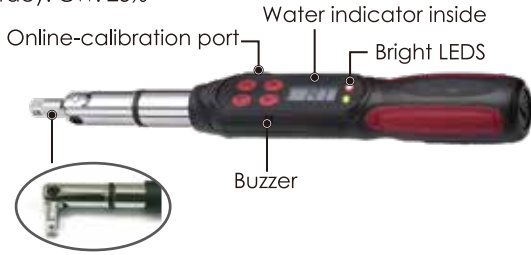

### Contents:

- 1pc - Digital Adjustable Spanner
- 1pc - Valve Stem Torque Tool
- 2pc - Deep Socket 11mm, 19mm

ITEM NO.	Setting Range	Bit Head	Length
TF05-012CN-S1	0.6~12Nm	1/4"	216mmL

## Digital Screwdriver

Accuracy: TF05-SP05BU - CW:  $\pm 2\%$ , CCW:  $\pm 3\%$   
TF05-SP2AU, TF05-SP4AU - CW:  $\pm 1\%$ , CCW:  $\pm 2\%$



ITEM NO.	Bit	Memory	Setting Range	Length
TF05-SP05BU	1/4"	250	5~50cNm	203mmL
TF05-SP2AU	1/4"	250	10~200cNm	203mmL
TF05-SP4AU	1/4"	250	20~400cNm	203mmL

## Digital Adjustable Spanner

Accuracy: CW:  $\pm 3\%$



ITEM NO.	Open Size (mm)	Setting Range	Length
TF05-W EA08-060	5~26	3~60Nm	428mmL
TF05-W EA08-085	5~26	4.2~85Nm	428mmL
TF05-W EA08-135	5~26	6.8~135Nm	428mmL
TF05-W EA10-135	5~30	6.8~135Nm	525mmL
TF05-W EA10-200	5~30	10~200Nm	525mmL
TF05-W EA12-200	10~41	10~200Nm	650mmL
TF05-W EA12-340	10~41	17~340Nm	650mmL

When press U button with one second would shown "Unit setting" only.  
When press U button with hold more than one second would shown "Mode" and "Online Calibration".

## Digital Torque Wrench

Accuracy:  $\pm 2\%$



ITEM NO.	Driver	Setting Range	Length
GA40-360100	1/2"	40-340Nm	630mmL
GA40-360101	1/2"	40~200Nm	535mmL
GA40-360102	3/8"	27~135Nm	455mmL








## 2-IN-1 Electronic Torque Screwdriver Wrench

Accuracy:  $\pm 2\%$




ITEM NO.	Driver	Setting Range	Length
GA40-363205	Hex: 6.4mm Square: 1/4"	1~30Nm	305mmL



# TORQUE WRENCH

## Digital Torque Wrench Tools

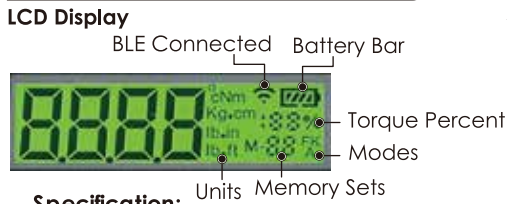

### Specification:

- Memory Setting: 30Sets
- Warning Light: 2LED(1 Green + 1 Red)
- Alert Light Ring: 18LED(9 Green + 9 Red)
- Vibration Warning: Yes
- Mode: Peak(K) / Track(F) / Angle(A)
- Units: Nm, kg.cm, kg.m, lb-in, lb-ft

### Rechargeable Battery Technical Data:

- Battery Type: 16650
- Battery Capacity: 1600 mAh
- Type: USB Charge (Type-C)
- Recharge time: 90-120mins

- Quick Release
- Reversible Ratchet

- LCD Backlight Display
- LED Alert (● + ●)
- Buzzer

- Battery Cover or USB Insert (Type C)

## Rechargeable Digital Torque Wrench

Accuracy: CW:±1.5%, CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CHTQ30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-CHTQ30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-CHTQ60-2	72T	3/8"	3~60Nm	392mmL
TF07-CHTQ135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-CHTQ135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-CHTQ200-3	72T	1/2"	10~200Nm	546mmL
TF07-CHTQ340-3	72T	1/2"	17~340Nm	648mmL
TF07-CHTQ400-3	72T	1/2"	20~400Nm	648mmL
TF07-CHTQ600-4	24T	3/4"	60~600Nm	933mmL
TF07-CHTQ600-5	24T	1"	60~600Nm	933mmL
TF07-CHTQ800-4	24T	3/4"	80~800Nm	1335mmL
TF07-CHTQ800-5	24T	1"	80~800Nm	1440mmL
TF07-CHTQ1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-CHTQ1000-5	24T	1"	100~1000Nm	1440mmL

## Digital Torque Wrench

Accuracy: CW:±1.5%, CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-DGTQ30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-DGTQ30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-DGTQ60-2	72T	3/8"	3~60Nm	392mmL
TF07-DGTQ135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-DGTQ135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-DGTQ200-3	72T	1/2"	10~200Nm	546mmL
TF07-DGTQ340-3	72T	1/2"	17~340Nm	648mmL
TF07-DGTQ400-3	72T	1/2"	20~400Nm	648mmL
TF07-DGTQ600-4	24T	3/4"	60~600Nm	933mmL
TF07-DGTQ600-5	24T	1"	60~600Nm	938mmL
TF07-DGTQ800-4	24T	3/4"	80~800Nm	1335mmL
TF07-DGTQ800-5	24T	1"	80~800Nm	1440mmL
TF07-DGTQ1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-DGTQ1000-5	24T	1"	100~1000Nm	1440mmL

## Digital Angle Torque Wrench

Accuracy: CW:±1.5%, CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-DGTA30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-DGTA30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-DGTA60-2	72T	3/8"	3~60Nm	392mmL
TF07-DGTA135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-DGTA135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-DGTA200-3	72T	1/2"	10~200Nm	546mmL
TF07-DGTA340-3	72T	1/2"	17~340Nm	648mmL
TF07-DGTA400-3	72T	1/2"	20~400Nm	648mmL
TF07-DGTA600-4	24T	3/4"	60~600Nm	933mmL
TF07-DGTA600-5	24T	1"	60~600Nm	938mmL
TF07-DGTA800-4	24T	3/4"	80~800Nm	1335mmL
TF07-DGTA800-5	24T	1"	80~800Nm	1440mmL
TF07-DGTA1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-DGTA1000-5	24T	1"	100~1000Nm	1440mmL

## Bluetooth Digital Torque Wrench

Accuracy: CW:±1.5%, CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CBTQ30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-CBTQ30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-CBTQ60-2	72T	3/8"	3~60Nm	392mmL
TF07-CBTQ135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-CBTQ135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-CBTQ200-3	72T	1/2"	10~200Nm	546mmL
TF07-CBTQ340-3	72T	1/2"	17~340Nm	648mmL
TF07-CBTQ400-3	72T	1/2"	20~400Nm	648mmL
TF07-CBTQ600-4	24T	3/4"	60~600Nm	933mmL
TF07-CBTQ600-5	24T	1"	60~600Nm	933mmL
TF07-CBTQ800-4	24T	3/4"	80~800Nm	1335mmL
TF07-CBTQ800-5	24T	1"	80~800Nm	1440mmL
TF07-CBTQ1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-CBTQ1000-5	24T	1"	100~1000Nm	1440mmL

## Rechargeable Digital Angle Torque Wrench

Accuracy: CW:±1.5%, CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CHTA30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-CHTA30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-CHTA60-2	72T	3/8"	3~60Nm	392mmL
TF07-CHTA135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-CHTA135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-CHTA200-3	72T	1/2"	10~200Nm	546mmL
TF07-CHTA340-3	72T	1/2"	17~340Nm	648mmL
TF07-CHTA400-3	72T	1/2"	20~400Nm	648mmL
TF07-CHTA600-4	24T	3/4"	60~600Nm	933mmL
TF07-CHTA600-5	24T	1"	60~600Nm	933mmL
TF07-CHTA800-4	24T	3/4"	80~800Nm	1335mmL
TF07-CHTA800-5	24T	1"	80~800Nm	1440mmL
TF07-CHTA1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-CHTA1000-5	24T	1"	100~1000Nm	1440mmL

### Bluetooth Digital Angle Torque Wrench

Accuracy: CW:±1.5% , CCW:±2.5%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CBTA30-1	72T	1/4"	1.5~30Nm	392mmL
TF07-CBTA30-2	72T	3/8"	1.5~30Nm	392mmL
TF07-CBTA60-2	72T	3/8"	3~60Nm	392mmL
TF07-CBTA135-2	72T	3/8"	6.8~135Nm	418mmL
TF07-CBTA135-3	72T	1/2"	6.8~135Nm	436mmL
TF07-CBTA200-3	72T	1/2"	10~200Nm	546mmL
TF07-CBTA340-3	72T	1/2"	17~340Nm	648mmL
TF07-CBTA400-3	72T	1/2"	20~400Nm	648mmL
TF07-CBTA600-4	24T	3/4"	60~600Nm	933mmL
TF07-CBTA600-5	24T	1"	60~600Nm	933mmL
TF07-CBTA800-4	24T	3/4"	80~800Nm	1335mmL
TF07-CBTA800-5	24T	1"	80~800Nm	1440mmL
TF07-CBTA1000-4	24T	3/4"	100~1000Nm	1335mmL
TF07-CBTA1000-5	24T	1"	100~1000Nm	1440mmL

### Bluetooth Digital Interchangeable Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CBTI30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-CBTI30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-CBTI60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-CBTI135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-CBTI135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-CBTI200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-CBTI340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-CBTI400-3	14x18mm	1/2"	40~400Nm	638mmL
TF07-CBTI600-4	14x18mm	3/4"	60~600Nm	905mmL

### Rechargeable Digital Flexible Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CHTF30-1	72T	1/4"	3~30Nm	408mmL
TF07-CHTF135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-CHTF200-3	72T	1/2"	20~200Nm	560mmL
TF07-CHTF340-3	72T	1/2"	34~340Nm	685mmL
TF07-CHTF400-3	72T	1/2"	40~400Nm	685mmL

### Rechargeable Digital Interchangeable & Angle Torque Wrench


Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CHIA30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-CHIA30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-CHIA60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-CHIA135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-CHIA135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-CHIA200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-CHIA340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-CHIA400-3	14x18mm	1/2"	40~400Nm	638mmL
TF07-CHIA600-4	14x18mm	3/4"	60~600Nm	905mmL

### Digital Interchangeable Torque Wrench


Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-DGTI30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-DGTI30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-DGTI60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-DGTI135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-DGTI135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-DGTI200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-DGTI340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-DGTI400-3	14x18mm	1/2"	40~400Nm	638mmL

### Rechargeable Digital Interchangeable Torque Wrench


Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CHTI30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-CHTI30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-CHTI60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-CHTI135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-CHTI135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-CHTI200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-CHTI340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-CHTI400-3	14x18mm	1/2"	40~400Nm	638mmL

### Digital Flexible Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-DGTF30-1	72T	1/4"	3~30Nm	408mmL
TF07-DGTF135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-DGTF200-3	72T	1/2"	20~200Nm	560mmL
TF07-DGTF340-3	72T	1/2"	34~340Nm	685mmL
TF07-DGTF400-3	72T	1/2"	40~400Nm	685mmL

### Bluetooth Digital Flexible Torque Wrench


Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CBTF30-1	72T	1/4"	3~30Nm	408mmL
TF07-CBTF135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-CBTF200-3	72T	1/2"	20~200Nm	560mmL
TF07-CBTF340-3	72T	1/2"	34~340Nm	685mmL
TF07-CBTF400-3	72T	1/2"	40~400Nm	685mmL

### Digital Interchangeable & Angle Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-DGIA30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-DGIA30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-DGIA60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-DGIA135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-DGIA135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-DGIA200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-DGIA340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-DGIA400-3	14x18mm	1/2"	40~400Nm	638mmL

### Bluetooth Digital Interchangeable & Angle Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CBIA30-1	9x12mm	1/4"	3~30Nm	387mmL
TF07-CBIA30-2	9x12mm	3/8"	3~30Nm	395mmL
TF07-CBIA60-2	9x12mm	3/8"	6~60Nm	395mmL
TF07-CBIA135-2	9x12mm	3/8"	13.5~135Nm	410mmL
TF07-CBIA135-3	14x18mm	1/2"	13.5~135Nm	430mmL
TF07-CBIA200-3	14x18mm	1/2"	20~200Nm	538mmL
TF07-CBIA340-3	14x18mm	1/2"	34~340Nm	638mmL
TF07-CBIA400-3	14x18mm	1/2"	40~400Nm	638mmL
TF07-CBIA600-4	14x18mm	3/4"	60~600Nm	905mmL

### Rechargeable Digital Flexible & Angle Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CHFA30-1	72T	1/4"	3~30Nm	408mmL
TF07-CHFA135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-CHFA200-3	72T	1/2"	20~200Nm	560mmL
TF07-CHFA340-3	72T	1/2"	34~340Nm	685mmL
TF07-CHFA400-3	72T	1/2"	40~400Nm	685mmL

### Mini Digital Torque Wrench (Square)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-DMTQ06	72T	1/4"	0.3~6Nm	244mmL
TF07-DMTQ15	72T	1/4"	0.75~15Nm	244mmL
TF07-DMTQ25	72T	1/4"	1.25~25Nm	244mmL
TF07-DMTQ60	72T	3/8"	3~60Nm	290mmL

### Mini Rechargeable Digital Torque Wrench (Square)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CMTQ06	72T	1/4"	0.3~6Nm	244mmL
TF07-CMTQ15	72T	1/4"	0.75~15Nm	244mmL
TF07-CMTQ25	72T	1/4"	1.25~25Nm	244mmL
TF07-CMTQ60	72T	3/8"	3~60Nm	290mmL

### Mini Bluetooth Digital Torque Wrench (Square)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CBMQ06	72T	1/4"	0.3~6Nm	244mmL
TF07-CBMQ15	72T	1/4"	0.75~15Nm	244mmL
TF07-CBMQ25	72T	1/4"	1.25~25Nm	244mmL
TF07-CBMQ60	72T	3/8"	3~60Nm	290mmL

### Digital Flexible & Angle Torque Wrench

Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-DGFA30-1	72T	1/4"	3~30Nm	408mmL
TF07-DGFA135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-DGFA200-3	72T	1/2"	20~200Nm	560mmL
TF07-DGFA340-3	72T	1/2"	34~340Nm	685mmL
TF07-DGFA400-3	72T	1/2"	40~400Nm	685mmL

### Bluetooth Digital Flexible & Angle Torque Wrench


Accuracy: CW:±2% , CCW:±3%



ITEM NO.	Teeth	Driver	Setting Range	Length
TF07-CBFA30-1	72T	1/4"	3~30Nm	408mmL
TF07-CBFA135-2	72T	3/8"	13.5~135Nm	438mmL
TF07-CBFA200-3	72T	1/2"	20~200Nm	560mmL
TF07-CBFA340-3	72T	1/2"	34~340Nm	685mmL
TF07-CBFA400-3	72T	1/2"	40~400Nm	685mmL

### Mini Digital Torque Wrench Tools

#### LCD Display

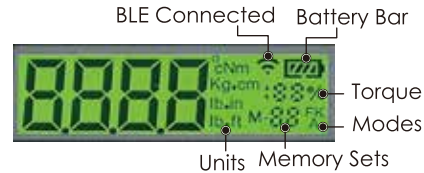

Quick Release  
Reversible Ratchet

LCD Backlight Display

#### Specification:

- Memory Setting: 30Sets
- Warning Light: 2LED(1 Green + 1 Red)
- Vibration Warning: Yes
- Mode: Peak(K) / Track(F)
- Units: cNm , Nm , kg.cm , lb-in , lb-ft

LED Alert (● + ●)  
Buzzer

Handle(non-slip)

#### Rechargeable Battery Technical Data:

- Battery Type: 10440
- Battery Capacity: 320 mAh\*2
- Type: USB Charge (Type-C)
- Recharge time: 60-90mins

Vibration Function

Battery Cover

### Mini Digital Torque Wrench (Bit)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Bit Insert	Driver	Setting Range	Length
TF07-DMTB06	Hex	1/4"	0.3~6Nm	244mmL
TF07-DMTB15	Hex	1/4"	0.75~15Nm	244mmL
TF07-DMTB25	Hex	1/4"	1.25~25Nm	244mmL

## Mini Rechargeable Digital Torque Wrench (Bit)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Bit Insert	Driver	Setting Range	Length
TF07-CMTB06	Hex	1/4"	0.3~6Nm	244mmL
TF07-CMTB15	Hex	1/4"	0.75~15Nm	244mmL
TF07-CMTB25	Hex	1/4"	1.25~25Nm	244mmL

## Mini Bluetooth Digital Torque Wrench (Bit)

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Bit Insert	Driver	Setting Range	Length
TF07-CBMB06	Hex	1/4"	0.3~6Nm	244mmL
TF07-CBMB15	Hex	1/4"	0.75~15Nm	244mmL
TF07-CBMB25	Hex	1/4"	1.25~25Nm	244mmL

## Mini Digital Interchangeable Torque Wrench

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-DMTI06	9x12mm	1/4"	0.6~6Nm	255mmL
TF07-DMTI15	9x12mm	1/4"	1.5~15Nm	255mmL
TF07-DMTI25	9x12mm	1/4"	2.5~25Nm	255mmL
TF07-DMTI60	9x12mm	3/8"	6~60Nm	304mmL

## Mini Rechargeable Digital Interchangeable Torque Wrench

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CMTI06	9x12mm	1/4"	0.6~6Nm	255mmL
TF07-CMTI15	9x12mm	1/4"	1.5~15Nm	255mmL
TF07-CMTI25	9x12mm	1/4"	2.5~25Nm	255mmL
TF07-CMTI60	9x12mm	3/8"	6~60Nm	304mmL

## Mini Bluetooth Digital Interchangeable Torque Wrench

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Insert	Driver	Setting Range	Length
TF07-CBMI06	9x12mm	1/4"	0.6~6Nm	255mmL
TF07-CBMI15	9x12mm	1/4"	1.5~15Nm	255mmL
TF07-CBMI25	9x12mm	1/4"	2.5~25Nm	255mmL
TF07-CBMI60	9x12mm	3/8"	6~60Nm	304mmL

## Mini Digital Torque Screwdriver

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Bit Insert	Setting Range	Length
TF07-DMSD50	Hex	5~50cNm	234mmL
TF07-DMSD200	Hex	10~200cNm	234mmL
TF07-DMSD400	Hex	20~400cNm	234mmL

## Mini Rechargeable Digital Torque Screwdriver

Accuracy: CW:±3% , CCW:±4%









ITEM NO.	Bit Insert	Setting Range	Length
TF07-CMSD50	Hex	5~50cNm	234mmL
TF07-CMSD200	Hex	10~200cNm	234mmL
TF07-CMSD400	Hex	20~400cNm	234mmL

## Mini Bluetooth Digital Torque Screwdriver

Accuracy: CW:±3% , CCW:±4%



ITEM NO.	Bit Insert	Setting Range	Length
TF07-CBSD50	Hex	5~50cNm	234mmL
TF07-CBSD200	Hex	10~200cNm	234mmL
TF07-CBSD400	Hex	20~400cNm	234mmL



## Digital Torque Adapter

Accuracy:  $\pm 2\%$



ITEM NO.	Driver	Memory	Setting Range	Length
TF04-11043N	3/4"	50	200~1000Nm	75mmL
TF04-11043	3/4"	50	100~500Nm	75mmL


## Digital Torque Adapter

Accuracy:  $\pm 3\%$



ITEM NO.	Driver	Setting Range	Size
TF05-TD2-030N	1/4"	6~30Nm	67x48.8x50.6mm
TF05-TD3-135CN	3/8"	27~135Nm	69x48.8x50.6mm
TF05-TD4-135CN	1/2"	27~135Nm	75x48.8x50.6mm
TF05-TD4-200CN	1/2"	40~200Nm	75x48.8x50.6mm
TF05-TD4-340CN	1/2"	68~340Nm	75x48.8x50.6mm

## Digital Torque Adapter

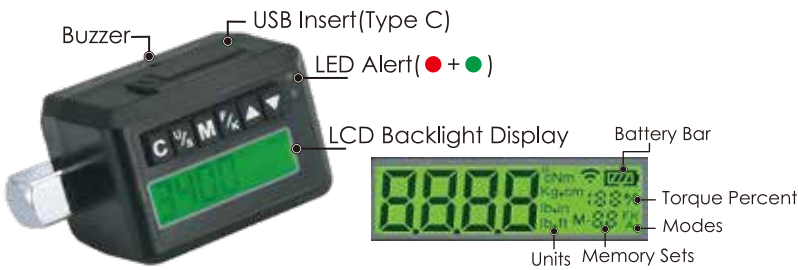

### Specification:

- Memory Setting: 30Sets
- Warning Light: 2LED(1 Green + 1 Red)
- Drop Test: 1m
- Mode: Peak(K) / Track(F) / Angle(A)
- Units: Nm , kg.cm , lb-in , lb-ft

### Rechargeable Battery Technical Data:

- Battery Type: 602535
- Battery Capacity: 500 mAh
- Type: USB Charge (Type-C)
- Recharge time: 90-120mins
- Rated Input: 5V= 1A

## Digital Torque Adapter

Accuracy: CW:  $\pm 1.5\%$  , CCW:  $\pm 2.5\%$



ITEM NO.	Driver	Setting Range	Size
TF07-DGTS60-1	3/8"	3~60Nm	75x42x39mm
TF07-DGTS135-1	3/8"	6.8~135Nm	75x42x39mm
TF07-DGTS200-2	1/2"	10~200Nm	75x42x39mm
TF07-DGTS340-2	1/2"	17~340Nm	75x42x39mm

## Rechargeable Digital Torque Adapter

Accuracy: CW:  $\pm 1.5\%$  , CCW:  $\pm 2.5\%$



ITEM NO.	Driver	Setting Range	Size
TF07-CHTS60-1	3/8"	3~60Nm	75x44x39mm
TF07-CHTS135-1	3/8"	6.8~135Nm	75x44x39mm
TF07-CHTS200-2	1/2"	10~200Nm	75x44x39mm
TF07-CHTS340-2	1/2"	17~340Nm	75x44x39mm

## Digital Angle Torque Adapter

Accuracy: CW:  $\pm 1.5\%$  , CCW:  $\pm 2.5\%$  | Max. Angle: 720°



ITEM NO.	Driver	Setting Range	Size
TF07-DG TSA60-1	3/8"	3~60Nm	75x50x39mm
TF07-DG TSA135-1	3/8"	6.8~135Nm	75x50x39mm
TF07-DG TSA200-2	1/2"	10~200Nm	75x50x39mm
TF07-DG TSA340-2	1/2"	17~340Nm	75x50x39mm

## Rechargeable Digital Angle Torque Adapter

Accuracy: CW:  $\pm 1.5\%$  , CCW:  $\pm 2.5\%$  | Max. Angle: 360°



ITEM NO.	Driver	Setting Range	Size
TF07-CHTSA60-1	3/8"	3~60Nm	75x44x39mm
TF07-CHTSA135-1	3/8"	6.8~135Nm	75x44x39mm
TF07-CHTSA200-2	1/2"	10~200Nm	75x44x39mm
TF07-CHTSA340-2	1/2"	17~340Nm	75x44x39mm

