



AIR TOOL

Impact wrench / Ratchet wrench / Air Drill / Hammer / Rivet /
Needle / Screwdriver / Die grinder / Eraser / Sander / Spray gun

3/8" Super Duty Impact Wrench



AF35-243V-SR

- SQ Drive: 13/8"
- Weight kg (lb): 1.2(2.6)
- Air Inlet: 1/4"
- Air Hose: 3/8"
- Working Pressure: 90psi(6.3kg/cm)
- Max Torque: 320ft-lb(434 N-M)
- Vibration (m/s): 3.6
- Sound Level (dBA): 95

1/2" Mini Super Duty Impact Wrench



AF35-243V-SR-4

- SQ Drive: 1/2"
- Weight kg (lb): 1.2(2.6)
- Air Inlet: 1/4"
- Air Hose: 3/8"
- Working Pressure: 90psi(6.3kg/cm)
- Max Torque: 330ft-lb(448 N-M)
- Vibration (m/s): 3.6
- Sound Level (dBA): 95

1/2" Heavy Duty Impact Wrench



AF35-306

- Square Drive Inch (mm): 1/2"(12.7)
- Blot Capacity Inch (mm): 5/8"(16)
- Free Speed R.P.M: 8,000
- Net Weight LBS(kg): 5.3(2.4)
- Length Inch (mm): 7.7(195)
- Noise Level (dBA): 85
- Max Torque Ft-lbs (Nm): 400(543)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 4.2(120)

3/8" Super Duty Impact Wrench



AF35-243-SR

- Square Drive Inch (mm): 3/8"(9.5)
- Blot Capacity Inch (mm): 1/2"(12.7)
- Free Speed R.P.M: 10,000
- Net Weight LBS(kg): 3.7(1.7)
- Length Inch (mm): 6(152)
- Noise Level (dBA): 91
- Max Torque Ft-lbs (Nm): 260(353)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 2.8(80)

1/2" Heavy Duty Impact Wrench



AF35-302

- Square Drive Inch (mm): 1/2"(12.7)
- Blot Capacity Inch (mm): 5/8"(16)
- Free Speed R.P.M: 7,000
- Net Weight LBS(kg): 5(2.3)
- Length Inch (mm): 7.3(186)
- Noise Level (dBA): 96
- Max Torque Ft-lbs (Nm): 320(435)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 3.7(105)

1/2" Super Duty Impact Wrench



AF35-303D-SR

- Square Drive Inch (mm): 1/2"(12.7)
- Blot Capacity Inch (mm): 3/4"(18)
- Free Speed R.P.M: 7,000
- Net Weight LBS(kg): 5.8(2.7)
- Length Inch (mm): 7.5(175)
- Noise Level (dBA): 90
- Max Torque Ft-lbs (Nm): 500(678)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 4.2(130)

1/2" Heavy Duty Impact Wrench



AF35-300-D

- Square Drive Inch (mm): 1/2"(12.7)
- Blot Capacity Inch (mm): 5/8"(16)
- Free Speed R.P.M: 7,000
- Net Weight LBS(kg): 5.9(2.7)
- Length Inch (mm): 7.5(190)
- Noise Level (dBA): 95
- Max Torque Ft-lbs (Nm): 380(516)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 4.2(120)

1/2" Super Duty Impact Wrench



AF35-305B

- Square Drive Inch (mm): 1/2"(12.7)
- Blot Capacity Inch (mm): 3/4"(18)
- Free Speed R.P.M: 7,000
- Net Weight LBS(kg): 5.8(2.7)
- Length Inch (mm): 7.2(183)
- Noise Level (dBA): 86
- Max Torque Ft-lbs (Nm): 480(651)
- Air Inlet Inch: 1/4" / Hose Size Inch: 3/8"
- Air Pressure PSI (kg/cm²): 90(6.3)
- Avg Air Cons CFM(L/min): 4.6(130)

1/2" Super Duty Impact Wrench



AF35-305V-SR

- SQ Drive: 1/2"
- Weight kg (lb): 2.0(4.4)
- Air Inlet: 1/4"
- Air Hose: 3/8"
- Working Pressure: 90psi(6.3kg/cm)
- Max Torque: 1000ft-lb(1357 N-M)
- Vibration (m/s): 3.4
- Sound Level (dBA): 95

1/2" Heavy Duty Air Impact Wrench - Pin Clutch



AF34-551

- Square Drive:1/2"
- Capacity Bolt Size:5/8"(16mm)
- Free Speed (PRM):8000
- Max.Torque:650ft-lbs/900Nm
- Sound Level(dBA):95
- Air Pressure (PSI):90
- Air Inlet:(NPT):1/4"
- Avg.Air Cons.(CFM):4.5
- Over Length:170mm
- Product Weight:1.9kgs(4.2Lbs)
- Speed: Forward:3 Speed / Reverse:1 Speed

1/2" Composite Impact Wrench - Twin Hammer



AF13-1285T

- Square Drive:1/2"
- Blot Capacity:16mm
- Max Torque:900FT-LB(125KG-M,1200N-M)
- Free Speed:6500R.P.M
- Air Consumption:4.8CFM
- Air Inlet:1/4" / Air Hose:10mm
- Air Pressure:90PSI
- Overall Length:122mm
- Net Weight:1.3kg

1/2" Heavy Duty Composite Impact Wrench - Twin Hammer



AF13-1285TH

- Square Drive:1/2"
- Blot Capacity:16mm
- Max Torque:1100FT-LB(152KG-M,1492N-M)
- Free Speed:5000R.P.M
- Air Consumption:4.9CFM
- Air Inlet:1/4"
- Air Pressure:90PSI
- Overall Length:186mm
- Net Weight:2.4kg
- Air Hose:10mm

Stubby 1/2" Composite Impact Wrench - Twin Hammer



AF13-0987T

- Square Drive:1/2"
- Blot Capacity:5/8"(16mm)
- Max Torque:550FT-LB(78KG-M,746N-M)
- Free Speed:7000R.P.M
- Air Inlet:1/4" / Air Hose:10mm
- Air Pressure:90PSI
- Overall Length:148mm

Stubby 1/2" Composite Impact Wrench - Twin Hammer



AF13-0985T

- Square Drive:1/2"
- Blot Capacity:13mm
- Max Torque:450FT-LB(62KG-M,610N-M)
- Free Speed:9000R.P.M
- Air Inlet:1/4" / Air Hose:10mm
- Air Pressure:90PSI
- Overall Length:122mm

1/2" Composite Air Impact Wrench



AF34-507ZN

- Hammer Mechanism:Twin hammer
- Square Drive:1/2"
- Capacity Bolt Size:5/8"(16mm)
- Free Speed (PRM):8000
- Max.Torque:750ft-lbs/1017Nm
- Air Pressure (PSI):90
- Air Inlet:(PT,NPT):1/4"
- Min.Hose Size:3/8" I.D.
- Avg.Air Cons.(CFM):4.5
- Over Length:195mm
- Product Weight:1.9kgs(4.2Lbs)
- Speed: Forward:3 Speed / Reverse:3 Speed

1/2" Composite Air Impact Wrench



AF34-650T




- Hammer Mechanism:Twin hammer
- Square Drive:1/2"
- Capacity Bolt Size:5/8"(16mm)
- Free Speed (PRM):8000
- Max.Torque:750ft-lbs/1017Nm
- Air Pressure (PSI):90
- Air Inlet:(PT,NPT):1/4"
- Min.Hose Size:3/8" I.D.
- Avg.Air Cons.(CFM):4.5
- Over Length:195mm
- Product Weight:1.9kgs(4.2Lbs)
- Speed: Forward:3 Speed / Reverse:2 Speed

1/2" Composite Air Impact Wrench



AF34-650P

- Hammer Mechanism:Pin Clutch
- Square Drive:1/2"
- Capacity Bolt Size:5/8"(16mm)
- Free Speed (PRM):8000
- Max.Torque:650ft-lbs/880Nm
- Air Pressure (PSI):90
- Air Inlet:(PT,NPT):1/4"
- Min.Hose Size:3/8" I.D.
- Avg.Air Cons.(CFM):4.5
- Over Length:210mm
- Product Weight:2.1kgs(4.6Lbs)
- Speed: Forward:3 Speed / Reverse:2 Speed



3/4" Super Duty Impact Wrench



AF35-278D-SR

- Square Drive Inch (mm):3/4"(19)
- Blot Capacity Inch (mm):1-1/4"(32)
- Free Speed R.P.M:5,000
- Net Weight LBS(kg):9.3(4.3)
- Length Inch (mm):8.5(217)
- Noise Level (dBA):96
- Max Torque Ft-lbs (Nm):1250(1695)
- Air Inlet Inch:3/8"
- Hose Size Inch:3/8"
- Air Pressure PSI (kg/cm²):90(6.3)
- Avg Air Cons CFM(L/min):8(230)

3/4" Heavy Duty Air Impact Wrench - Twin Hammer



AF34-508E

- Square Drive:3/4"
- Free Speed (PRM):4600
- Max.Torque(Forward):1200ft-lbs/1627Nm
- Max.Torque(Reverse):1500ft-lbs/2033Nm
- Sound Level(dBA):90
- Vibration(m/s²):6.1
- Air Pressure (PSI):90
- Air Inlet:(NPT):3/8"
- Avg.Air Cons.(CFM):9
- Speed: Forward:3 Speed / Reverse:1 Speed

1" Super Duty Impact Wrench



AF35-315F-SR-L

- SQDrive:1"
- Wiegth kg (lb):8.5(18.7)
- Air Inlet:1/2"
- Air House:1/2"
- Working Pressure:90-115psi(6.3-8kg/cm)
- Max Torque:1800ft-lb(2445 N-M)
- Vibration (m/s):5
- Sound Level (dBA):95

3/4" Super Duty Impact Wrench



AF35-278V-SR

- SQ Drive:3/4"
- Wiegth kg (lb):3.4(7.5)
- Air Inlet:3/8"
- Air Hose:3/8"
- Working Pressure:90psi(6.3kg/cm)
- Max Torque:1400ft-lb(1900 N-M)
- Vibration (m/s):3.5
- Sound Level (dBA):95

3/4" Composite Air Impact Wrench



AF34-508T

- Impact Mechanism:Twin hammer
- Square Drive:3/4"
- Capacity Bolt Size:1"(25.4mm)
- Free Speed (PRM):5000
- Max.Torque:1400ft-lbs/1898Nm
- Sound Level (dBA):85
- Air Pressure (PSI):90
- Air Inlet:(PT,NPT):3/8"
- Avg.Air Cons.(CFM):12
- Over Length:240mm
- Product Weight:3.6kgs(7.9Lbs)
- Handle exhaust Silent muffler device.
- 3 steps forward / 2 steps reverse regulator

1" Super Duty Impact Wrench



AF35-315G-SR-L

- SQDrive:1"
- Wiegth kg (lb):10.3(22.8)
- Air Inlet:1/2"
- Air House:1/2"
- Working Pressure:90-115psi(6.3-8kg/cm)
- Max Torque:2000ft-lb(2711 N-M)
- Vibration (m/s):5.5
- Sound Level (dBA):95

3/4" Light Weight Composite Impact Wrench - Twin Hammer



AF13-1985T

- Square Drive:1/2"
- Blot Capacity:16mm
- Max Torque:1100FT-LB(152KG-M, 1492N-M)
- Free Speed:5000R.P.M
- Air Consumption:4.9CFM
- Air Inlet:1/4" / Air Hose:10mm
- Air Pressure:90PSI
- Overall Length:191mm
- Net Weight:2.6kg

1" Super Duty Impact Wrench



AF35-315P

- Square Drive Inch (mm):1"(25.4)
- Blot Capacity Inch (mm):1-3/4"(45)
- Free Speed R.P.M:4,000
- Net Weight LBS(kg):13.6(10.6)
- Length Inch (mm):21.1(536)
- Noise Level (dBA):95
- Max Torque Ft-lbs (Nm):1800(1445)
- Air Inlet Inch:1/2" / House Size Inch:1/2"
- Air Pressure PSI (kg/cm²):90-115(6.3-8)
- Avg Air Cons CFM(L/min):12(340)

1" Heavy Duty Impact Wrench



AF35-316

- Square Drive Inch (mm):1"(25.4)
- Blot Capacity Inch (mm):1-1/2"(38)
- Free Speed R.P.M:35,000
- Net Weight LBS(kg):21.1(9.6)
- Length Inch (mm):11.8(300)
- Noise Level (dBA):96
- Max Torque Ft-lbs (Nm):1400(1900)
- Air Inlet Inch:1/2" / House Size Inch:1/2"
- Air Pressure PSI (kg/cm²):90-115(6.3-8)
- Avg Air Cons CFM(L/min):11(312)

1" Super Duty Impact Wrench



AF35-318F-SR

- SQDrive:1"
- Wieght kg (lb):7.2(15.8)
- Air Inlet:1/2"
- Air House:1/2"
- Working Pressure:90-115psi(6.3-8kg/cm)
- Max Torque:1800ft-lb(2445 N-M)
- Vibration (m/s):5.7
- Sound Level (dBA):95

1" Super Duty Impact Wrench



AF35-318P-SR

- Square Drive Inch (mm):1"(25.4)
- Blot Capacity Inch (mm):1-5/8"(41)
- Free Speed R.P.M:3500
- Net Weight LBS(kg):21.1(9.6)
- Length Inch (mm):11.8(300)
- Noise Level (dBA):96
- Max Torque Ft-lbs (Nm):1800(2445)
- Air Inlet Inch:1/2" / -House Size Inch:1/2"
- Air Pressure PSI (kg/cm²):90-115(6.3-8)
- Avg Air Cons CFM(L/min):11(312)

1/2" Air Impact Wrench Kit



AF14-904K1

- 1pc Air Impact Wrench
- 1pc 5" Extension Bar
- 1pc Mini Oiler
- 1pc Hex Key Wrench
- 1pc Nipple
- 10pcs Sockets:9,10,11,13,14,17,19,22,24,27mm or 7/16",1/2",9/16",5/8",11/16",3/4",13/16",7/8",15/16",1"
- 1pc Plastic Carrying Case

8Pcs Set 1/2" Impact Wrench Kit



AF13-0985TK3/AF13-0987TK3

- 1PC:AF13-0985T/AF13-0987T
- 3PCS:Thin Wall Impact Sockets 17,19,21mm(Chorme-Molybolenum)
- 1PC:75mm Extension Bar
- 1PC:Oil Pot
- 1PC:Nipple
- 1PC:Plastic Case

14Pcs Set 1/2" Impact Wrench Kit



AF13-0985TK/AF13-0987TK

- 1PC:AF13-0985T/AF13-0987T
- 9PCS:Mini Sockets(CR-V) 13,14,15,16,17,18,19,21,24mm
- 1PC:75mm Extension Bar
- 1PC:Oil Pot
- 1PC:Nipple
- 1PC:Plastic Case

17Pcs Set 1/2" Impact Wrench Kit



AF13-0985TK2/AF13-0987TK2




- 1PC:AF13-0985T/AF13-0987T
- 9PCS:Mini Sockets(CR-V) 13,14,15,16,17,18,19,21,24mm
- 3PCS:Thin Wall Impact Sockets 17,19,21mm(Chorme-Molybolenum)
- 1PC:75mm Extension Bar
- 1PC:Oil Pot
- 1PC:Nipple
- 1PC:Plastic Case

17Pcs Set 1/2" Impact Wrench Kit



AF13-1285TK/AF13-1285THK

- 1PC:AF13-1285T/AF13-1285TH
- 10PCS:Air Sockets(Chorme-Molybolenum) 9,10,11,13,14,17,19,22,24,27mm
- 1PC:5" Extension Bar
- 1PC:Oil Pot
- 1PC:4mm Hex Wrench
- 1PC:Nipple
- 1PC:Plastic Case
- 1PC:Mini Oiler



1/4" Mini Ratchet Wrench



AF35-221

- Square Drive:1/4"(6mm)
- Blot Capacity:1/4"(6mm)
- Net Weight:1.3lbs(0.59kg)
- Length:6.85"(174mm)
- Avg.Air Cons: 3.8cfm(110 l/min)
- Air Inlet:1/4" / Hose size:3/8"
- Air Pressure:90psi(6.3kg/cm)
- Free Speed:220r.m.p
- Max Torque:26ft-lb(35N-M)
- Sound Level:83dBA


1/4" & 3/8" SQ.DR.Air Ratchet Wrench



AF13-RA204 / AF13-RA204A

- Free Speed:260R.P.M
- Max Torque:25FT-LB.
- Square Drive:1/4"&3/8"
- Air Pressure:90PSI
- Air Consumption:5CFM
- Air Inlet:1/4"
- Air Hose:1/4"
- Overall Length:160mm
- Net Weight:0.5kg

3/8"SQ.DR.Air Ratchet Wrench



AF13-RA38

- Free Speed:160R.P.M
- Max Torque:90FT-LB.
- Square Drive:3/8"
- Air Pressure:90PSI
- Air Consumption:3.7CFM
- Air Inlet:1/4"
- Air Hose:3/8"
- Overall Length:254mm
- Net Weight:1.20kg

1/4" Mini Ratchet Wrench



AF35-221F

- Square Drive:1/4"(6mm)
- Blot Capacity:1/4"(6mm)
- Net Weight:1.25lbs(0.57kg)
- Length:7.6"(194mm)
- Avg.Air Cons: 1.9cfm(55 l/min)
- Air Inlet:1/4" / Hose size:3/8"
- Air Pressure:90psi(6.3kg/cm)
- Free Speed:230r.m.p
- Max Torque:26ft-lb(35N-M)
- Sound Level:83dBA

1/4" & 3/8" SQ.DR.Air Ratchet Wrench



AF13-RA206 / AF13-RA206A

- Free Speed:260R.P.M
- Max Torque:20FT-LB.
- Square Drive:1/4" & 3/8"
- Air Pressure:90PSI
- Air Consumption:6.5CFM
- Air Inlet:1/4"
- Air Hose:1/4"
- Overall Length:130mm
- Net Weight:0.44kg

3/8" Air Narrow Ratchet Wrench



AF13-RA209

- Free Speed:170R.P.M
- Bolt Size: 10/11/12/13/14 mm
- Max Torque:90FT-LB.
- Square Drive:3/8"
- Air Pressure:90PSI
- Air Consumption:3.7CFM
- Air Inlet:1/4"
- Air Hose:3/8"
- Overall Length:254mm
- Net Weight:1.25kg

1/4" Air Ratchet Wrench



AF03-61010

- Size:1/4"
- Free Speed:420R.P.M
- Max Torque:20ft/lb27.5N-M
- Air Consumption:13scfm
- Length:4.72"12.5cm
- Weight:0.88lb/0.4kg
- Noise:85db

3/8" Ratchet Wrench



AF35-217F

- Square Drive:3/8"(9.5mm)
- Blot Capacity:3/8"(9.6mm)
- Net Weight:1.98lbs(0.9kg)
- Length:10.6"(270mm)
- Avg.Air Cons: 6cfm(170 l/min)
- Air Inlet:1/4" / -Hose size:1/4"
- Air Pressure:90psi(6.3kg/cm)
- Free Speed:160r.m.p
- Max Torque:60ft-lb(82N-M)
- Sound Level:86dBA

3/8"SQ.DR.Air Ratchet Wrench With Handle Grip



AF13-RA38A

- Free Speed:160R.P.M
- Max Torque:90FT-LB.
- Square Drive:3/8"
- Air Pressure:90PSI
- Air Consumption:3.7CFM
- Air Inlet:1/4"
- Air Hose:3/8"
- Overall Length:254mm
- Net Weight:1.20kg

3/8" Mini Ratchet Wrench



AF03-61020

- Size:3/8"
- Free Speed:420R.P.M
- Max Torque:20ft/lb27.5N-M
- Air Consumption:13scfm
- Length:4.72"12.5cm
- Weight:0.88lb/0.4kg
- Noise:85db

1/2"SQ.DR.Air Ratchet Wrench With Handle Grip



AF13-RA12A

- Free Speed:160R.P.M
- Max Torque:90FT-LB.
- Square Drive:1/2"
- Air Pressure:90PSI
- Air Consumption:3.7CFM
- Air Inlet:1/4"
- Air Hose:3/8"
- Overall Length:254mm
- Net Weight:1.25kg


3/8" Air Ratchet Wrench



AF04-700

- Chuck Size In.(mm):Square Drive 3/8
- Torqu (ft-lbs/kg-m):50/6.9
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):10.4(265)
- RPM:3600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

1/2"SQ.DR.Air Ratchet Wrench

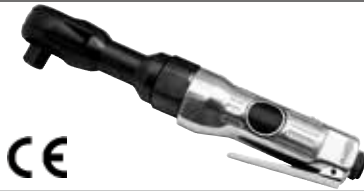

AF13-RA12

- Free Speed:160R.P.M
- Max Torque:90FT-LB.
- Square Drive:3/8"
- Air Pressure:90PSI
- Air Consumption:3.7CFM
- Air Inlet:1/4"
- Air Hose:3/8"
- Overall Length:254mm
- Net Weight:1.25kg

1/2" Air Ratchet Wrench



AF04-705




- Chuck Size In.(mm):Square Drive 1/2"
- Torqu (ft-lbs/kg-m):50/6.9
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):10.4(265)
- RPM:3600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

1/2" Air Ratchet Wrench Kit (Heavy Duty Type)



AF14-106HK3

- 1pc 1/2" Air Ratchet Wrench
- 7pcs Sockets:10,11,12,13,14,17,19mm
- 1pc 1/2" Universal Joint
- 1pc 75mm Extension
- 1pc 1/2" *1/4 Bit Holder
- 16pcs 1/4" 25mm bits(S2):
 ⊕PH2-PH3-PH4; ⊖5.5-6.5-8mm;
 ○4-5-6-7-8mm; ⊗T20-T25-T27-T30-T40
- 1pc Oil Pot
- 1pc Nipple
- 1pc Service kit



3/8" Reversible Drill



AF35-600R

- Free Speed:1800r.p.m.
- Chuck Size:3/8"
- Net Weight:2.8lbs(1.3kg)
- Length:7"(177mm)
- Avg.Air Cons:3.2cfm(90 l/min)
- Air Inlet:1/4" / Hose Size:3/8"
- Air Pressure:90psi(6.3kg/cm²)
- Sound Level:87dBA

3/8" Air Drill



AF04-221

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2(0.9)
- LengthIn.(mm):7.6(195)
- RPM:2600
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.7

3/8" Air Reversible Drill



AF04-213P

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2(0.9)
- LengthIn.(mm):7.6(195)
- RPM:1800
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

3/8" Composite Reversible Air Drill



AF34-4201F

- Chuck Size:3/8"(10mm)
- Free Speed(RPM):1800
- Sound Level (dBA):86
- Avg.Air Cons.(CFM):4
- Rec.Air Pressure(PSI):90
- Air Inlet(PT):1/4"

3/8" Air Reversible Drill (Feathering Control)



AF04-213DP

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2(0.9)
- LengthIn.(mm):7.6(195)
- RPM:1800
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

3/8" Air Reversible Drill (Feather Control)



AF04-213DP

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2(0.9)
- LengthIn.(mm):7.6(195)
- RPM:1800
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

3/8" Composite Reversible Air Drill



AF34-4201F-1

- Chuck Size:3/8"(10mm)
- Free Speed(RPM):1800
- Sound Level (dBA):86
- Avg.Air Cons.(CFM):4
- Rec.Air Pressure(PSI):90
- Air Inlet(PT):1/4"

3/8" Air Reversible Drill (Feather Control)



AF04-213D

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2(0.9)
- LengthIn.(mm):7.6(195)
- RPM:1800
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

3/8" Air Drill



AF04-265P

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.2(210)
- RPM:3600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

3/8" Air Drill



AF04-245P

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.4(215)
- RPM:2600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

1HP 3/8" Air Drill



AF04-29265

- Collect Size In.(mm):Spindle Thread 3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.2(210)
- RPM:3600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4.1

3/8" Reversible Air Drill



AF34-4201

- Chuck Size:3/8"(10mm)
- Free Speed(RPM):1800
- Sound Level (dBA):86
- Vibration(m/s²):2.4
- Air Pressure(PSI):90
- Avg.Air Cons.(CFM):4
- Air Inlet(PT):1/4"

3/8" Air Drill



AF04-265

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.2(210)
- RPM:3600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

1HP 3/8" Air Drill



AF04-29245

- Collect Size In.(mm):Spindle Thread 3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.2(210)
- RPM:2600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4.1

3/8" Composite Reversible Drill



AF35-615R

- Free Speed:1800r.p.m.
- Chuck Size:3/8"
- Net Wiegth:2.2lbs(1kg)
- length:6.85"(174mm)
- Avg.Air Cons:8.5cfm(240 l/min)
- Air Inlet:1/4"
- Hose Size:3/8"
- Air Pressure:90psi(6.3kg/cm²)
- Sound Level:81dBA

3/8" Air Drill



AF04-245

- Chuck Size In.(mm):3/8(10)
- Spindle Thread:3/8"-24
- Weight Lbs.(kg):1.8(0.8)
- Length In.(mm):8.4(215)
- RPM:2600
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.5

3/8" 90° Angle Air Reversible Drill



AF04-257




- Chuck Size In.(mm):3/8(10)
- Weight Lbs.(kg):2.4(1.1)
- Length In.(mm):8.2(210)
- RPM:16000
- Air Inlet In.:1/4
- Min. Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.6

1/2" Composite Reversible Drill



AF35-616R

- Free Speed:400r.p.m.
- Chuck Size:1/2"
- Net Wiegth:2.87lbs(1.3kg)
- length:8.75"(207mm)
- Avg.Air Cons:8.5cfm(240 l/min)
- Air Inlet:1/4"
- Hose Size:3/8"
- Air Pressure:90psi(6.3kg/cm²)
- Sound Level:81dBA



1/2" Reversible Drill



AF35-61012

- Free Speed:750r.p.m.
- Chuck Size:1/2"
- Net Weight:3.6lbs(1.76kg)
- Length:8"(203mm)
- Avg.Air Cons:3.2cfm(90 l/min)
- Air Inlet:1/4" / -Hose Size:3/8"
- Air Pressure:90psi(6.3kg/cm²)
- Sound Level:87dBA

1/2" Air Reversible Drill (Feather Control)



AF04-214D

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):3.6(1.2)
- LengthIn.(mm):9(230)
- RPM:450
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Reversible Drill



AF04-216

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):3.6(1.2)
- LengthIn.(mm):9(230)
- RPM:700
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Drill



AF04-212P

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2.6(1.2)
- LengthIn.(mm):9(230)
- RPM:900
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):3.7

1/2" Air Reversible Drill



AF04-214P

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2.6(1.2)
- LengthIn.(mm):9(230)
- RPM:450
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Reversible Drill (Feather Control)



AF04-216D

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2.6(1.2)
- LengthIn.(mm):9(230)
- RPM:700
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Reversible Drill



AF04-214

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2.6(1.2)
- LengthIn.(mm):9(230)
- RPM:450
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Reversible Drill (Feather Control)



AF04-214DP

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):3.6(1.2)
- LengthIn.(mm):9(230)
- RPM:450
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4

1/2" Air Reversible Drill (Feather Control)



AF04-216DP

- Chuck Size In.(mm):1/2(13)
- Spindle Thread:3/8"-24
- Weight Lb.(kg):2.6(1.2)
- LengthIn.(mm):9(230)
- RPM:700
- Air Inlet In.:1/4
- Min.Hose Size In.(mm):3/8(10)
- Avg.Air Cons.(CFM):4